

THE OPTICAL DEPTH SENSOR (ODS) FOR MARS AND EARTH ENVIRONMENTS

P. Rannou, M. Perreux GSMA, Université de Reims Champagne Ardenne /CNRS UMR 6089, France (pascal.rannou@univ-reims.fr), **J.-P. Pommereau, Jean-Luc Maria**, LATMOS, CNRS, UMR 8190, universite de Versailles, France,

Introduction:

The optical depth sensor (ODS) was developed to retrieve the optical depth of the dust layer and to characterize the high altitude clouds on Mars. The sensor has been developed and was used for a field experiment in Africa in order to validate the concept and test the performance. In this work we present main principle of the retrieval, the instrumental concept and the result of the tests performed during the 2004-2005 winter field experiment.

Motivations and objectives :

On Mars like on Earth, dust and clouds play an important role on meteorology and climate. On Earth: high altitude thin sub-visible cirrus clouds near the tropical tropopause are important players of the hydration / dehydration of the stratosphere, while Saharan and Asian mineral dust play a key role in the radiative transfer in the upper troposphere. On Mars: in the absence of condensed water and precipitation, dust lifted by storms is controlling the radiative balance of the atmosphere and are the unique condensation nuclei available. Its seasonal cycle is known to show a strong interannual variability. The capacity of ODS is the monitoring of dust optical thickness and size distribution on a daily basis as well as the detection of the altitude and opacity of high altitude sub-visible cirrus at twilight. On Mars, ODS was onboard Mars 96, then selected on Netlander, on the Scout project Pascal, and currently part of the Atmosphere Environmental Package (AEP) on the Humboldt Station of the ESA Exomars Mission. On Earth, ODS prototype deployed in West Africa sahel region in Ouagadougou, Burkina Faso next to a AERONET station.

Principle of the measurement: For the dust : opacity is retrieved by comparing the flux scattered by the atmosphere, and the sum of the scattered + the direct solar flux, observed from the surface. The ratio of these two fluxes depends on the total dust opacity. It is independent of any absolute calibration. For the clouds : Color index ($C.I = I_{RED} / I_{BLUE}$) with two channels. When high altitude clouds are present, they produce a peak in the time variation of C.I at the twilight. In this presentation, we will present the procedures used to retrieve the dust optical dust and the high altitude cirrus altitude and opacity. Such procedures were used to analyze the data taken during the Ouagadougou field campaign. We then show our results concerning cloud properties and the dust optical depth. The latter is shown along with the retrieval of the AERONET photometer.

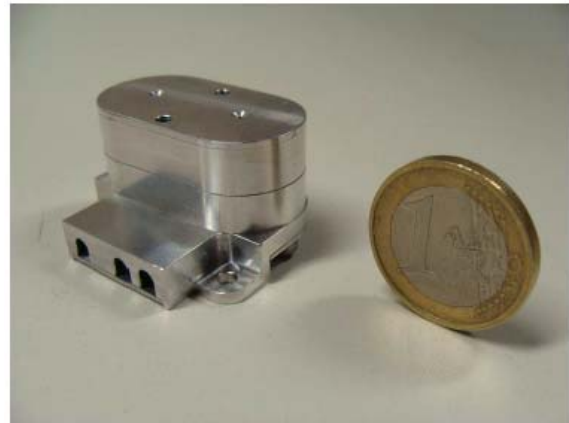


Figure 1: Optical head of the ODS instrument. The total weight of the instrument for two channels is 63 g : 28 g for the optical head and 35 g for the electronics

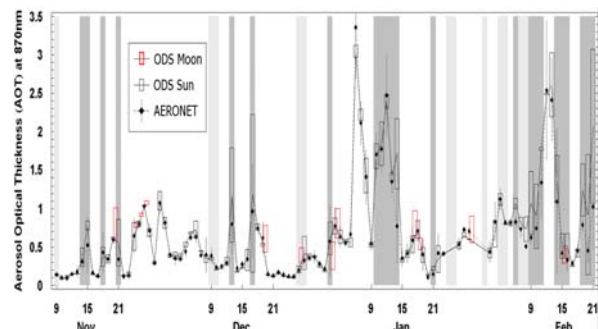


Figure 2: ODS and AERONET aerosol optical thickness (AOT) between Nov 2004 and Feb 2005 in Ouagadougou. Nightly retrieval is also possible when moon crosses ODS field of view. Light grey bands indicate days of electric supply failure and dark grey bands cloudy days.

- Tran et al., "The optical depth sensor", Note du pole de planétologie de l'IPSL, N° 11, (2005) (http://www.ipsl.jussieu.fr/documentation/NotesPlaneto/Archives/NPP_11.pdf)
- Tran The-Trung, "Optical Depth Sensor for the measurement of dust and clouds in the atmosphere of Mars. Radiative transfer simulations and validation on Earth", Thèse, (2005). <http://ttrung.free.fr/me/These.pdf>
- Tran et al., "Scientific aspects of the optical depth sensor", Adv. Space Res., 1.36, 2182-2186. doi:10.1016/j.asr.2005.08.021, 2006.
- Maria et al., "Technical aspects of the optical depth sensor", Adv. Space Res., 1. 38, 726-729, doi:10.1016/j.asr.2005.07.079, 2006